



EMPOWERING GREEN ENERGY ON GRID INVERTER

GIGAX POWER INVERTER SERIES

Rating : 1kW - 136kW





UTL in 2023-2024

3

Manufacturing Units

29

Years Old Brand

60+

Strong R&D Team

120

kVA- We made upto 120kVA Capacity

3000+

Associated Man Power

500+

Distributor in INDIA

3600+

Dealers in INDIA

5000000+

Satisfied UTL Consumers

9.2 Bn

UTL Turnover



FEATURES



Low startup Voltage



PV overload upto 30%



DC switch available on above 4.2kW



Wide AC Voltage Range (160V to 290V)



Working Temperature upto 60°C



AC & DC Side Type-II



Less Noise Emission >25dB



Remote Monitoring through UTL SOLAR App



High MPPT Efficiency upto 99%



Power Export Limiting



Easy Installation Low Maintenance

| Model | 1.5kW | 2.2kW | 2.5kW | 3kW | 3.3kW | 3.6kW |
|------------------------------------------|-------------------------------------------------------------------------------------------------|-------|-------|-------|-------|-------|
| Input Side | | | | | | |
| Max. DC Input Power (kW) | 2 | 2.9 | 3.3 | 3.9 | 4.29 | 4.6 |
| Max. DC Input Voltage (V) | 550 | | | | | |
| Start-up DC Input Voltage (V) | 80 | | | | | |
| MPPT Operating Range (V) | 70~500 | | | | | |
| Max. DC Input Current (A) | 16/20 | | | | | |
| Max. Short Circuit Current (A) | 22/24/30 | | | | | |
| No.of MPP Trackers | 1 | | | | | |
| No.of Strings per MPP Tracker | 1 | | | | | |
| Output Side | | | | | | |
| Rated Output Power (kW) | 1.5 | 2.2 | 2.5 | 3 | 3.3 | 3.6 |
| Max. Active Power (kW) | 1.65 | 2.42 | 2.75 | 3.3 | 3.6 | 3.6 |
| Nominal Output Voltage / Range (V) | L/N/PE 220/230V (Optional) | | | | | |
| Rated Grid Frequency (Hz) | 50 / 60 (Optional) | | | | | |
| Operating Phase | Single phase | | | | | |
| Rated AC Grid Output Current (A) (230V) | 6.5 | 8.7 | 10.9 | 13 | 14.3 | 15.65 |
| Max. AC Output Current (A) (230V) | 7.2 | 9.6 | 12 | 14.3 | 15.65 | 15.65 |
| Output Power Factor | 1 (0.8 Lead to 0.8 Lag) | | | | | |
| Grid Current THD | <3% | | | | | |
| DC Injection Current (mA) | <0.5% | | | | | |
| Grid Frequency Range | 50/60Hz (±5) | | | | | |
| Efficiency | | | | | | |
| Max. Efficiency | 97.3% | | | 97.5% | | |
| Euro Efficiency | 97.1% | | | 97.3% | | |
| MPPT Efficiency | >99% | | | | | |
| Protection | | | | | | |
| DC Reverse-Polarity Protection | Yes | | | | | |
| AC Short Circuit Protection | Yes | | | | | |
| AC Output Overcurrent Protection | Yes | | | | | |
| Output Overvoltage Protection | Yes | | | | | |
| Insulation Resistance Protection | Yes | | | | | |
| Ground Fault Monitoring | Yes | | | | | |
| Anti-islanding Protection | Yes | | | | | |
| Temperature Protection | Yes | | | | | |
| Integrated DC Switch | Yes (Optional) | | | | | |
| Remote software update | Yes | | | | | |
| Remote change of operating parameters | Yes | | | | | |
| Surge protection | DC Type II / AC Type II | | | | | |
| General Data | | | | | | |
| Topology | Transformerless | | | | | |
| Internal Consumption | <1W (Night) | | | | | |
| Running Temperature | -25~65°C, >45°C derating | | | | | |
| Ingress Protection | IP65 | | | | | |
| Noise Emission (Typical) | <35 dB | | | | | |
| Cooling Concept | Natural cooling | | | | | |
| Max. Operating Altitude Without Derating | 2000m | | | | | |
| Warranty | 10 Years, 1 Year on Accessories (Logger & ZED) | | | | | |
| Grid Connection Standard | CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11 | | | | | |
| Operating Surroundings Humidity | 0-100% | | | | | |
| Safety EMC / Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | | |
| Features | | | | | | |
| DC Connection | MC-4 mateable | | | | | |
| AC Connection | IP65 rated plug | | | | | |
| Display | LCD1602 | | | | | |
| Interface | RS485/RS232/Wifi/LAN | | | | | |

*Specification are subject to change without prior notice due to constant improvement in design & technology.

| Model | 4kW | 4.6kW | 5kW | 5.3kW | 6kW |
|------------------------------------------|-------------------------------------------------------------------------------------------------|-------|-------|---------|-------|
| Input Side | | | | | |
| Max. DC Input Power (kW) | 5.2 | 5.5 | 6.5 | 6.5 | 7.8 |
| Max. DC Input Voltage (V) | 550 | | | 550/600 | |
| Start-up DC Input Voltage (V) | 80 | | | 80 | |
| MPPT Operating Range (V) | 70~500 | | | 70~550 | |
| Max. DC Input Current (A) | 20 | | | | |
| Max. Short Circuit Current (A) | 30 | | | | |
| No. of MPP Trackers | 1 | | | | |
| No. of Strings per MPP Tracker | 1 | | | | |
| Output Side | | | | | |
| Rated Output Power (kW) | 4 | 4.6 | 5 | 5.3 | 6 |
| Max. Active Power (kW) | 4.4 | 4.6 | 5.5 | 5.5 | 6/6.6 |
| Nominal Output Voltage / Range (V) | L/N/PE 220/230V (Optional) | | | | |
| Rated Grid Frequency (Hz) | 50 / 60 (Optional) | | | | |
| Operating Phase | Single phase | | | | |
| Rated AC Grid Output Current (A) (230V) | 17.4 | 20 | 21.73 | 23.04 | 26.08 |
| Max. AC Output Current (A) (230V) | 19.13 | 20 | 23.91 | 23.91 | 26.08 |
| Output Power Factor | 1 (0.8 Lead to 0.8 Lag) | | | | |
| Grid Current THD | <3% | | | | |
| DC Injection Current (mA) | <0.5% | | | | |
| Grid Frequency Range | 50/60Hz (±5) | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 97.5% | | | | |
| Euro Efficiency | 97.3% | | | | |
| MPPT Efficiency | >99% | | | | |
| Protection | | | | | |
| DC Reverse-Polarity Protection | Yes | | | | |
| AC Short Circuit Protection | Yes | | | | |
| AC Output Overcurrent Protection | Yes | | | | |
| Output Overvoltage Protection | Yes | | | | |
| Insulation Resistance Protection | Yes | | | | |
| Ground Fault Monitoring | Yes | | | | |
| Anti-islanding Protection | Yes | | | | |
| Temperature Protection | Yes | | | | |
| Integrated DC Switch | Yes (Optional) | | | | |
| Remote software update | Yes | | | | |
| Remote change of operating parameters | Yes | | | | |
| Surge protection | DC Type II / AC Type II | | | | |
| General Data | | | | | |
| Topology | Transformerless | | | | |
| Internal Consumption | <1W (Night) | | | | |
| Running Temperature | -25~65°C, >45°C derating | | | | |
| Ingress Protection | IP65 | | | | |
| Noise Emission (Typical) | <35 dB | | | | |
| Cooling Concept | Natural cooling | | | | |
| Max. Operating Altitude Without Derating | 2000m | | | | |
| Warranty | 10 Years, 1 Year on Accessories (Logger & ZED) | | | | |
| Grid Connection Standard | CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11 | | | | |
| Operating Surroundings Humidity | 0-100% | | | | |
| Safety EMC / Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | |
| Features | | | | | |
| DC Connection | MC-4 mateable | | | | |
| AC Connection | IP65 rated plug | | | | |
| Display | LCD1602 | | | | |
| Interface | RS485/RS232/Wifi/LAN | | | | |

*Specification are subject to change without prior notice due to constant improvement in design & technology.

| Model | 5kW | 6kW | 8kW | 10kW | 12kW | 15kW |
|------------------------------------------|-------------------------------------------------------------------------------------------------|-----|-------|------|-------|-------------------|
| Input Side | | | | | | |
| Max. DC Input Power (kW) | 6.5 | 7.8 | 10.4 | 13 | 15.6 | 19.5 |
| Max. DC Input Voltage (V) | 1100 | | | | | |
| Start-up DC Input Voltage (V) | 140 | | | | | |
| MPPT Operating Range (V) | 120~1000 | | | | | |
| Max. DC Input Current (A) | (18+18) / (20+20) | | | | | (18+30) / (20+26) |
| Max. Short Circuit Current (A) | (26+26) / (30+30) | | | | | (26+36) / (30+39) |
| No.of MPP Trackers | 2 | | | | | |
| No.of Strings per MPP Tracker | 1 | | | | | 1+2 |
| Output Side | | | | | | |
| Rated Output Power (kW) | 5 | 6 | 8 | 10 | 12 | 15 |
| Max. Active Power (kW) | 5.5 | 6.6 | 8.8 | 11 | 13.2 | 16.5 |
| Nominal Output Voltage / Range (V) | 3L/N/PE 220/380V, 230/400V | | | | | |
| Rated Grid Frequency (Hz) | 50 / 60 (Optional) | | | | | |
| Operating Phase | Three phase | | | | | |
| Rated AC Grid Output Current (A) | 7.2 | 8.7 | 11.6 | 14.5 | 17.4 | 21.7 |
| Max. AC Output Current (A) | 8 | 9.6 | 12.8 | 15.9 | 19.1 | 23.9 |
| Output Power Factor | 1 (0.8 Lead to 0.8 Lag) | | | | | |
| Grid Current THD | <3% | | | | | |
| DC Injection Current (mA) | <0.5% | | | | | |
| Grid Frequency Range | 50/60Hz (±5) | | | | | |
| Efficiency | | | | | | |
| Max. Efficiency | 98.2% | | 98.3% | | 98.5% | |
| Euro Efficiency | 97.26% | | 97.8% | | 98% | |
| MPPT Efficiency | >99% | | | | | |
| Protection | | | | | | |
| DC Reverse-Polarity Protection | Yes | | | | | |
| AC Short Circuit Protection | Yes | | | | | |
| AC Output Overcurrent Protection | Yes | | | | | |
| Output Overvoltage Protection | Yes | | | | | |
| Insulation Resistance Protection | Yes | | | | | |
| Ground Fault Monitoring | Yes | | | | | |
| Anti-islanding Protection | Yes | | | | | |
| Temperature Protection | Yes | | | | | |
| Integrated DC Switch | Yes | | | | | |
| Remote software update | Yes | | | | | |
| Remote change of operating parameters | Yes | | | | | |
| Surge protection | DC Type II / AC Type II | | | | | |
| General Data | | | | | | |
| Topology | Transformerless | | | | | |
| Internal Consumption | <1W (Night) | | | | | |
| Running Temperature | -25~65°C, >45°C derating | | | | | |
| Ingress Protection | IP65 | | | | | |
| Noise Emission (Typical) | <30 dB | | | | | <40 dB |
| Cooling Concept | Natural cooling | | | | | Smart cooling |
| Max. Operating Altitude Without Derating | 2000m | | | | | |
| Warranty | 10 Years, 1 Year on Accessories (Logger & ZED) | | | | | |
| Grid Connection Standard | CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11 | | | | | |
| Operating Surroundings Humidity | 0-100% | | | | | |
| Safety EMC / Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | | |
| Features | | | | | | |
| DC Connection | MC-4 mateable | | | | | |
| AC Connection | IP65 rated plug | | | | | |
| Display | LCD1602 | | | | | |
| Interface | RS485/RS232/Wifi/LAN | | | | | |

*Specification are subject to change without prior notice due to constant improvement in design & technology.

| Model | 20kW | 25kW | 30kW | 40kW | 50kW | 60kW |
|------------------------------------------|-------------------------------------------------------------------------------------------------|-------|----------------|----------------------|----------------------|----------|
| Input Side | | | | | | |
| Max. DC Input Power (kW) | 26 | 32.5 | 39 | 52 | 65 | 78 |
| Max. DC Input Voltage (V) | 1100 | | | | | |
| Start-up DC Input Voltage (V) | 250 | | | | | |
| MPPT Operating Range (V) | 200~850 | | | | | |
| Max. DC Input Current (A) | 26+26 | 30+30 | 40+40+20/40+40 | 40+40+20+20/40+40+40 | 45+45+45/40+40+40+40 | |
| Max. Short Circuit Current (A) | 39+39 | 64+64 | 48+48+24/64+64 | 48+48+24+24/64+64+64 | 56+56+56/64+64+64+64 | |
| No.of MPP Trackers | 2 | | 3/2 | 4/3 | | 3/4 |
| No.of Strings per MPP Tracker | 2 | | 2/3 | 4/3 | | 3/3, 3/4 |
| Output Side | | | | | | |
| Rated Output Power (kW) | 20 | 25 | 30 | 40 | 50 | 60 |
| Max. Active Power (kW) | 22 | 27.5 | 33 | 44 | 55 | 66 |
| Nominal Output Voltage / Range (V) | 3L/N/PE 220/380V, 230/400V | | | | | |
| Rated Grid Frequency (Hz) | 50 / 60 (Optional) | | | | | |
| Operating Phase | Three phase | | | | | |
| Rated AC Grid Output Current (A) | 29 | 36.2 | 43.5 | 58 | 72.4 | 87 |
| Max. AC Output Current (A) | 31.9 | 39.9 | 7.9 | 63.8 | 79.7 | 95.7 |
| Output Power Factor | 1 (0.8 Lead to 0.8 Lag) | | | | | |
| Grid Current THD | <3% | | | | | |
| DC Injection Current (mA) | <0.5% | | | | | |
| Grid Frequency Range | 50/60Hz (±5) | | | | | |
| Efficiency | | | | | | |
| Max. Efficiency | 98.6% | | | 98.7% | | |
| Euro Efficiency | 97.8% | | | 98% | | |
| MPPT Efficiency | >99% | | | | | |
| Protection | | | | | | |
| DC Reverse-Polarity Protection | Yes | | | | | |
| AC Short Circuit Protection | Yes | | | | | |
| AC Output Overcurrent Protection | Yes | | | | | |
| Output Overvoltage Protection | Yes | | | | | |
| Insulation Resistance Protection | Yes | | | | | |
| Ground Fault Monitoring | Yes | | | | | |
| Anti-islanding Protection | Yes | | | | | |
| Temperature Protection | Yes | | | | | |
| Integrated DC Switch | Yes | | | | | |
| Remote software update | Yes | | | | | |
| Remote change of operating parameters | Yes | | | | | |
| Surge protection | DC Type II / AC Type II | | | | | |
| General Data | | | | | | |
| Topology | Transformerless | | | | | |
| Internal Consumption | <1W (Night) | | | | | |
| Running Temperature | -25~65°C, >45°C derating | | | | | |
| Ingress Protection | IP65 | | | | | |
| Noise Emission (Typical) | <40 dB | | | <50 dB | | |
| Cooling Concept | Smart cooling | | | | | |
| Max. Operating Altitude Without Derating | 2000m | | | | | |
| Warranty | 10 Years, 1 Year on Accessories (Logger & ZED) | | | | | |
| Grid Connection Standard | CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11 | | | | | |
| Operating Surroundings Humidity | 0-100% | | | | | |
| Safety EMC / Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | | |
| Features | | | | | | |
| DC Connection | MC-4 mateable | | | | | |
| AC Connection | IP65 rated plug | | | | | |
| Display | LCD1602 | | | LCD 240 × 160 | | |
| Interface | RS485/RS232/Wifi/LAN | | | | | |

*Specification are subject to change without prior notice due to constant improvement in design & technology.

| Model | 70kW | 75kW | 80kW | 90kW | 100kW | 110kW |
|------------------------------------------|-------------------------------------------------------------------------------------------------|-------------|-------------|-------------------|-------------|-------------|
| Input Side | | | | | | |
| Max. DC Input Power (kW) | 105 | 112.5 | 120 | 135 | 150 | 165 |
| Max. DC Input Voltage (V) | 1100 | | | | | |
| Start-up DC Input Voltage (V) | 250 | | | | | |
| MPPT Operating Range (V) | 200~850 | | | | | |
| Max. DC Input Current (A) | 40+40+40+40 | | | 40+40+40+40+40+40 | | |
| Max. Short Circuit Current (A) | 64+64+64+64 | | | 64+64+64+64+64+64 | | |
| No.of MPP Trackers | 4 | | | 6 | | |
| No.of Strings per MPP Tracker | 4 | | | | | |
| Output Side | | | | | | |
| Rated Output Power (kW) | 70 | 75 | 80 | 90 | 100 | 110 |
| Max. Active Power (kW) | 77 | 82.5 | 88 | 99 | 110 | 121 |
| Nominal Output Voltage / Range (V) | 3L/N/PE 220/380V, 230/400V | | | | | |
| Rated Grid Frequency (Hz) | 50 / 60 (Optional) | | | | | |
| Operating Phase | Three phase | | | | | |
| Rated AC Grid Output Current (A) | 106.1/101.5 | 113.6/108.7 | 121.2/115.9 | 136.4/130.4 | 151.5/144.9 | 166.7/159.4 |
| Max. AC Output Current (A) | 116.7/111.6 | 125/119.6 | 133.3/127.5 | 150/143.5 | 166.7/159.4 | 183.3/175.4 |
| Output Power Factor | 1 (0.8 Lead to 0.8 Lag) | | | | | |
| Grid Current THD | <3% | | | | | |
| DC Injection Current (mA) | <0.5% | | | | | |
| Grid Frequency Range | 50/60Hz (±5) | | | | | |
| Efficiency | | | | | | |
| Max. Efficiency | 98.7% | | | | | |
| Euro Efficiency | 98.3% | | | | | |
| MPPT Efficiency | >99% | | | | | |
| Protection | | | | | | |
| DC Reverse-Polarity Protection | Yes | | | | | |
| AC Short Circuit Protection | Yes | | | | | |
| AC Output Overcurrent Protection | Yes | | | | | |
| Output Overvoltage Protection | Yes | | | | | |
| Insulation Resistance Protection | Yes | | | | | |
| Ground Fault Monitoring | Yes | | | | | |
| Anti-islanding Protection | Yes | | | | | |
| Temperature Protection | Yes | | | | | |
| Integrated DC Switch | Yes | | | | | |
| Remote software update | Yes | | | | | |
| Remote change of operating parameters | Yes | | | | | |
| Surge protection | DC Type II / AC Type II | | | | | |
| General Data | | | | | | |
| Size (mm) | 838Wx568Hx323D | | | | | |
| Weight (kg) | 81 | | | | | |
| Topology | Transformerless | | | | | |
| Internal Consumption | <1W (Night) | | | | | |
| Running Temperature | -25~65°C, >45°C derating | | | | | |
| Ingress Protection | IP65 | | | | | |
| Noise Emission (Typical) | <50 dB | <55 dB | | | | |
| Cooling Concept | Smart cooling | | | | | |
| Max. Operating Altitude Without Derating | 2000m | | | | | |
| Warranty | 10 Years, 1 Year on Accessories (Logger & ZED) | | | | | |
| Grid Connection Standard | CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11 | | | | | |
| Operating Surroundings Humidity | 0-100% | | | | | |
| Safety EMC / Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | | |
| Features | | | | | | |
| DC Connection | MC-4 mateable | | | | | |
| AC Connection | IP65 rated plug | | | | | |
| Display | LCD 240 × 160 | | | | | |
| Interface | RS485/RS232/Wifi/LAN | | | | | |

*Specification are subject to change without prior notice due to constant improvement in design & technology.

| Model | 120kW | 125kW | 130kW | 135kW | 136kW |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|-------------|-------------|
| Input Side | | | | | |
| Max. DC Input Power (kW) | 180 | 187.5 | 195 | 202.5 | 204 |
| Max. DC Input Voltage (V) | 1100 | | | | |
| Start-up DC Input Voltage (V) | 250 | | | | |
| MPPT Operating Range (V) | 200-1000 | | | | |
| Max. DC Input Current (A) | 40+40+40+40+40+40+40+40 | | | | |
| Max. Short Circuit Current (A) | 60+60+60+60+60+60+60+60 | | | | |
| No.of MPP Trackers | 8 | | | | |
| No.of Strings per MPP Tracker | 4+4+4+4+4+4+4+4 | | | | |
| Output Side | | | | | |
| Rated Output Power (kW) | 120 | 125 | 130 | 135 | 136 |
| Max. Active Power (kW) | 132 | 135 | 135 | 135 | 136 |
| Rated Output Voltage/Range (V) | 3L/N/PE 220/380V, 230/400V 0.85Un-1.1Un (this may vary with grid standards) | | | | |
| Rated Grid Frequency (Hz) | 50 / 60 (Optional) | | | | |
| Operating Phase | Three Phase | | | | |
| Rated AC Grid Output Current (A) | 181.9/174 | 189.4/181.2 | 197/188.5 | 204.6/195.7 | 206.1/197.2 |
| Max. AC Output Current (A) | 200/191.4 | 204.6/195.7 | 204.6/195.7 | 204.6/195.7 | 206.1/197.2 |
| Output Power Factor | >0.99 | | | | |
| Total Harmonics Current Distortion (THDi) | <3% | | | | |
| DC Injection Current (mA) | <0.5% | | | | |
| Grid Frequency Range | 45~55 or 55~65 (Optional) | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 98.8% | | | | |
| Euro Efficiency | 98.3% | | | | |
| MPPT Efficiency | >99% | | | | |
| Protection | | | | | |
| DC Reverse-Polarity Protection | Yes | | | | |
| AC Short Circuit Protection | Yes | | | | |
| AC Output Overcurrent Protection | Yes | | | | |
| Output Overvoltage Protection | Yes | | | | |
| Insulation Resistance Protection | Yes | | | | |
| Ground Fault Monitoring | Yes | | | | |
| Anti-islanding Protection | Yes | | | | |
| Temperature Protection | Yes | | | | |
| Integrated DC Switch | Yes | | | | |
| Remote Software Upload | Yes | | | | |
| Remote Change of Operating Parameters | Yes | | | | |
| Surge Protection | DC Type II / AC Type II | | | | |
| General Data | | | | | |
| Cabinet Size (WxHxD mm) | 1006×516×325.5 (Excluding Connectors and Brackets) | | | | |
| Weight (kg) | 103 | | | | |
| Topology | Transformerless | | | | |
| Internal Consumption | <1W (Night) | | | | |
| Running Temperature | -25-60°C, >45°C Derating | | | | |
| Ingress Protection | IP65 | | | | |
| Noise Emission (Typical) | ≤65 dB | | | | |
| Cooling Concept | Smart Cooling | | | | |
| Permissible Altitude (m) | 2000m | | | | |
| Designed Lifetime | >20 Years | | | | |
| Grid Connection Standard | IEC 61727, IEC 62116, CEI 0-21, CEI 0-16, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105, VDE-AR-N 4110 | | | | |
| Operating Surroundings Humidity | 0-100% | | | | |
| Safety EMC / Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | |
| Features | | | | | |
| Display | LCD 240 × 160 | | | | |
| Interface | RS485/RS232/Wifi/LAN | | | | |

*Specification are subject to change without prior notice due to constant improvement in design & technology.

LIFE TIME FREE MONITORING THROUGH UTL SOLAR APP



Please Scan QR Code to Download UTL SOLAR App

Based on technology of Internet, cloud service and big data, UTL SOLAR App provides systematic power station monitoring, data analysis for different energy systems to realize the maximum ROI.



ACCESSORIES

MONITORING DONGLE



Logger supports GPRS, WIFI, Ethernet and other communication modes. Its function enables local debugging configuration to collect operation and power generation data from inverters.

ZERO EXPORT POWER LIMITING

Integrated Export Limitation Functionality via external power meter or a CT



WORLD CLASS COMPONENTS

Main CPU



IGBT



DC Switch



Cooling Fan



Capacitor



MOV



Relay



Current Sensor



3 LEVEL SERVICE SUPPORT



Remote support if the problem can get resolved through online technical support




Complaint Registration at Hotline Number **+91 8510 885 885** via Call or raise the complaint on WhatsApp on Same Number



Engineer will visit the site for replace spare parts / Service Unit against the faulty inverter with in 48 Hrs from the date of Complaint login.

UTL SERVICE NETWORK

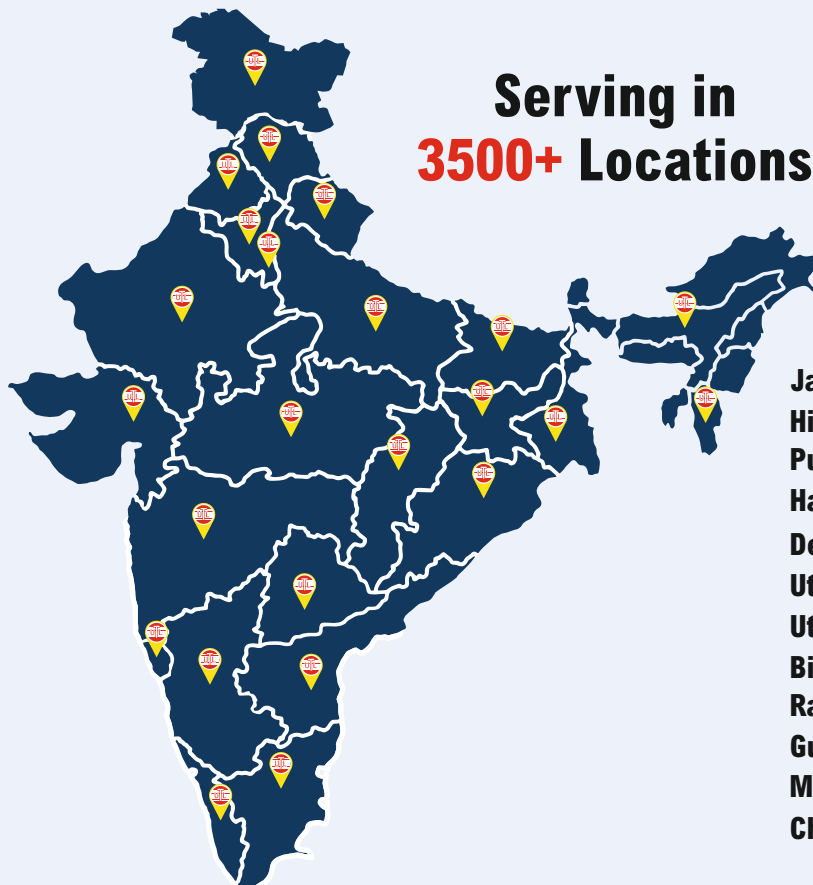

Jammu & Kashmir
Himanchal Pradesh
Punjab
Haryana
Delhi
Uttarakhand
Uttar Pradesh
Bihar
Rajasthan
Gujarat
Madhya Pradesh
Chhattisgarh

Jharkhand
West Bengal
Assam
Mizoram
Maharashtra
Goa
Odisha
Telangana
Andhra Pradesh
Karnataka
Kerala
Tamil Nadu

The Power..... As and when you need it.



**Inverters | Batteries | Solar PCUs | Online UPSs | EV Chargers |
VFD | Lithium Batteries | Solar Inverters | Solar Panels**

FUJIYAMA POWER SYSTEMS LTD.

Registered Office: 53A/6, Rama Road Ind. Area, Near Sat Guru Ram Singh Marg Metro Station, Near NDPL Grid Office, Delhi – 110015

Sales Office: 2/8A, Plot No-63, 2nd Floor Rama Road Industrial Area Opp. Kirti Nagar Metro Station New Delhi-110015

Manufacturing Unit 1 : Khasra No. 182, Vill-Naryal, Parwanoo, Himachal Pradesh-173220, India

Manufacturing Unit 2 : Plot No 51-52, Sector - Ecotech 1 Extension 1, Greater Noida, Distt Gautam Budh Nagar, U.P. - 201310, India

Manufacturing Unit 3 : Plot No. 5 & 14, Sector 6, HSIIDC, IMT BAWAL, Rewari, Bawal, , HR- 123501, India

 +91 7838 885 885

 sales@utlups.com

 www.upsINVERTER.com